


## IMF 26 HC



#### Self-contained ice maker - Paddle system Daily production up to 31 kg



### ► Position n°

### Industry ► Features & Plus


- AISI 304 SS Scotch Brite finish
- Tropical class +43°C

Hollow cube

- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- FDA approved ABS water basin
- Basin tipping safety system
- RoHS Free
- · Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- · Automatic water charge
- Standard and special voltages
- HFC Free










Disappearing insulated

AISI 304 SS Scotch Brite finish



Removable and cleanable air filter

#### ► Available ice cube size



#### ▶ Prod. 24h

	Air temp.		Water temp.		kg	lbs
,	10° C	50° F	7° C	45° F	31	68
•	21° C	70° F	15° C	60° F	22	49

# 2 Years Warranty subject to limitations

#### ► Certifications available for this model

















www.bremagroup.it info@bremaicegroup.it We are Brema






# IMF 26 HC



# Self-contained ice maker - Paddle system Daily production up to 31 kg

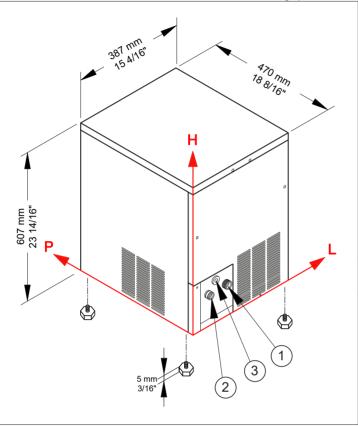

#### ► Working conditions

• Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

#### ▶ Performances

		- I		Water temperature					
		•	7° C	45° F	15° C	60° F	21° C	70° F	
	Φ	10° C	31 kg						
	Air temperature	50° F		68 lbs					
		21° C			22 kg				
	me	70° F				49 lbs			
	ir te	32° C					16 kg		
	⋖	90° F						35 lbs	

#### **▶** Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1) Water in.: 129 mm / 5 1/16" 137 mm / 5 6/16" 3/4"
- 2 Water out.: 56 mm / 2 3/16" 137 mm / 5 6/16" 24 mm / 15/16"
- (3) Electrical connections: 89 mm / 3 8/16" 180 mm / 7 1/16"

#### ► Technical information

Production in 24h	22 kg / 49 lbs
Store capacity, up to	4 kg / 9 lbs
Cooling system	A - W
Kind of cube	A-20g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	300 W
Fuse	10 A
Electrical consumption	31 kWh/100kg

Water consumption	A: 3 l/kg - 35,9 gal/100 lbs			
	W: 17 l/kg - 203,7 gal/100 lbs			
Sizes (L-P-H mm)	387 - 470 - 607			
(L-P-H in)	15 4/16 - 18 8/16 - 23 14/16			
Sizes with pack (L-P-H mm)	) 440 - 520 - 770			
(L-P-H in)	17 5/16 - 20 8/16 - 30 5/16			
Net weight	36 kg / 79 lbs			
Gross weight	42 kg / 93 lbs			
Finish F	AISI 304 stainless steel, scotch brite			

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (20 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025

We are Brema



