



IMF 28 HC



Self-contained ice maker - Paddle system Daily production up to 31 kg



► Position n°



► Features & Plus

- Hollow cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- FDA approved -ABS water basin
- Basin tipping safety system
- RoHS Free
- · Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- · Automatic water charge
- Standard and special voltages
- HFC Free





















BREMA

ICE W



FDA approved - ABS water basin


Disappearing insulated

AISI 304 SS Scotch Brite finish



Removable and cleanable air filter

► Available ice cube size



▶ Prod. 24h

	Air temp.		Water temp.		kg	lbs
,	10° C	50° F	7° C	45° F	31	68
•	21° C	70° F	15° C	60° F	22	49

2 Years Warranty subject to limitations

► Certifications available for this model

















www.bremagroup.it info@bremaicegroup.it We are Brema






IMF 28 HC



Self-contained ice maker - Paddle system Daily production up to 31 kg

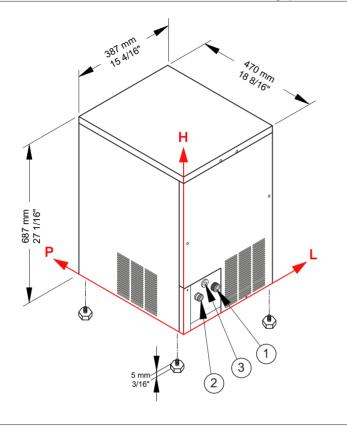

► Working conditions

• Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performances

	, [Water temperature					
				I	1		1	700 5
			7° C	45° F	15° C	60° F	21° C	70° F
	Air temperature	10° C	31 kg					
		50° F		68 lbs				
		21° C			22 kg			
	due	70° F				49 lbs		
	ir te	32° C					16 kg	
	⋖	90° F						35 lbs

▶ Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1) Water in.: 129 mm / 5 1/16" 137 mm / 5 6/16" 3/4"
- 2 Water out.: 56 mm / 2 3/16" 137 mm / 5 6/16" 24 mm / 15/16"
- (3) Electrical connections: 89 mm / 3 8/16" 180 mm / 7 1/16"

► Technical information

Production in 24h	22 kg / 49 lbs			
Store capacity, up to	8 kg / 18 lbs			
Cooling system	A - W			
Kind of cube	A-20g			
Refrigerant	R290			
Standard voltage	220-240 V ~ 50 Hz			
Average power consumption	300 W			
Fuse	10 A			
Electrical consumption	31 kWh/100kg			

Water consumption	A: 3 l/kg - 35,9 gal/100 lbs				
	W: 17 l/kg - 203,7 gal/100 lbs				
Sizes (L-P-H mm)	387 - 470 - 687				
(L-P-H in)	15 4/16 - 18 8/16 - 27 1/16				
Sizes with pack (L-P-H mm)	440 - 520 - 850				
(L-P-H in)	17 5/16 - 20 8/16 - 33 7/16				
Net weight	38 kg / 84 lbs				
Gross weight	45 kg / 99 lbs				
Finish	Acciaio inox 18/8, scotch brite				

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (20 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025

We are Brema



