

### IMF 35 HC



#### Self-contained ice maker - Paddle system Daily production up to 47 kg

Hotel Restaurant Fast food Bar Disco Fish market Supermarket Medical & SPA Industry

#### ► Position n°

### ► Features & Plus

- Hollow cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- · Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- FDA approved -ABS water basin
- Basin tipping safety system
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard and special voltages
- HFC Free























FDA approved - ABS



ICE O


Disappearing insulated

AISI 304 SS Scotch Brite finish



Removable and cleanable air filter

#### ► Available ice cube size



#### Prod. 24h

water basin

	Air temp.		Water temp.		kg	lbs
,	10° C	50° F	7° C	45° F	47	104
•	21° C	70° F	15° C	60° F	38	84

# 2 Years Warranty subject to limitations

#### ► Certifications available for this model

















www.bremagroup.it info@bremaicegroup.it We are Brema






## IMF 35 HC



# Self-contained ice maker - Paddle system Daily production up to 47 kg

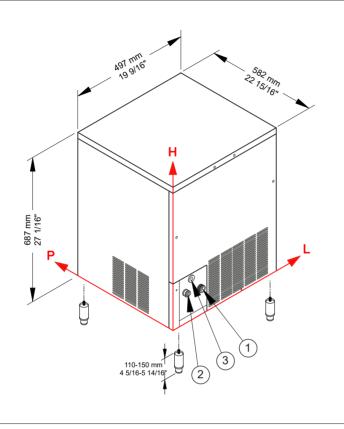

#### ► Working conditions

• Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

#### ▶ Performances

-								
			Water temperature					
		•	7° C	45° F	15° C	60° F	21° C	70° F
	Φ	10° C	47 kg					
	ıtnı	50° F		104 lbs				
	Air temperature	21° C			38 kg			
		70° F				84 lbs		
		32° C					33 kg	
	⋖	90° F						73 lbs

#### **▶** Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1 Water in.: 129 mm / 5 1/16" 132 mm / 5 3/16" 3/4"
- 2 Water out.: 56 mm / 2 3/16" 154 mm / 6 1/16" 24 mm / 15/16"
- ③ Electrical connections: 94mm / 3 11/16" 202 mm / 7 15/16"

#### ► Technical information

Production in 24h	38 kg / 84 lbs
Store capacity, up to	15 kg / 33 lbs
Cooling system	A - W
Kind of cube	A-20g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	400 W
Fuse	10 A
Electrical consumption	17 kWh/100kg

Water consumption	A: 3 l/kg - 35,9 gal/100 lbs			
	W: 14 l/kg - 167,8 gal/100 lbs			
Sizes (L-P-H mm)	497 - 582 - 687			
(L-P-H in)	19 9/16 - 22 15/16 - 27 1/16			
Sizes with pack (L-P-H mm)	550 - 630 - 850			
(L-P-H in)	21 10/16 - 24 13/16 - 33 7/16			
Net weight	47 kg / 104 lbs			
Gross weight	55 kg / 121 lbs			
Finish	Acciaio inox 18/8, scotch brite			

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (20 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025

We are Brema



