



IMF 58 HC

Ice Finger



Self-contained ice maker - Paddle system Daily production up to 56 kg

Hotel	██████████
Restaurant	██████████
Fast food	██████████
Bar	██████████
Disco	██████████
Fish market	██████████
Supermarket	██████████
Medical & SPA	██████████
Industry	██████████

► Position n°



► Features & Plus

- Hollow cube 
- AISI 304 SS Scotch Brite finish 
- Tropical class +43°C 
- Adjustable Stainless Steel feet
- Removable and cleanable air filter 
- Air or water cooling system
- Easy cleanable internal rounded surfaces 
- HCFC-Free insulated storage 
- FDA approved -ABS water basin
- Basin tipping safety system
- RoHS Free 
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch 
- Automatic water charge
- Standard and special voltages
- HFC Free 



AISI 304 SS Scotch Brite finish



Removable and cleanable air filter




FDA approved - ABS water basin



Disappearing insulated door

► Available ice cube size



► Prod. 24h

Air temp.	Water temp.		kg	lbs	
	10° C	50° F			7° C
21° C	70° F	15° C	60° F	46	101

2 Years Warranty
subject to limitations

► Certifications available for this model



www.bremagroup.it
info@bremagroup.it

We are Brema






Ice Finger

IMF 58 HC



Self-contained ice maker - Paddle system Daily production up to 56 kg

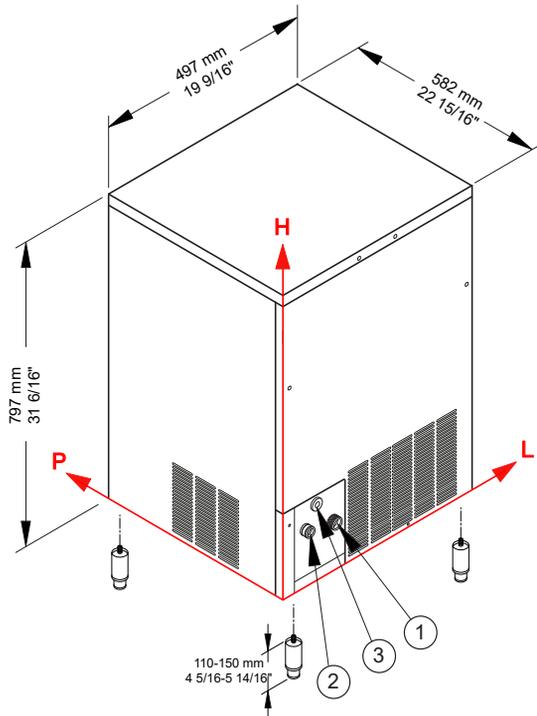

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

	Water temperature						
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	56 kg					
	50° F		123 lbs				
	21° C			46 kg			
	70° F				101 lbs		
	32° C					34 kg	
	90° F						75 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 129 mm / 5 1/16" - 132 mm / 5 3/16" - 3/4"
- ② Water out.: 56 mm / 2 3/16" - 154 mm / 6 1/16" - 24 mm / 15/16"
- ③ Electrical connections: 94 mm / 3 11/16" - 202 mm / 7 15/16"

► Technical information

Production in 24h	46 kg / 101 lbs	Water consumption	A: 4 l/kg - 47,9 gal/100 lbs
Store capacity, up to	20 kg / 44 lbs		W: 13 l/kg - 155,8 gal/100 lbs
Cooling system	A - W	Sizes (L-P-H mm)	497 - 582 - 797
Kind of cube	A-20g	(L-P-H in)	19 9/16 - 22 15/16 - 31 6/16
Refrigerant	R290	Sizes with pack (L-P-H mm)	550 - 630 - 960
Standard voltage	220-240 V ~ 50 Hz	(L-P-H in)	21 10/16 - 24 13/16 - 37 13/16
Average power consumption	420 W	Net weight	54 kg / 119 lbs
Fuse	10 A	Gross weight	62 kg / 137 lbs
Electrical consumption	21 kWh/100kg	Finish	Acciaio inox 18/8, scotch brite

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (20 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Electrical consumption at +32° C (standard voltage)
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremoicegroup.it

We are Brema

