






Ice Cube

C 150 HC



Modular ice maker - Sprayer system Daily production up to 155 kg

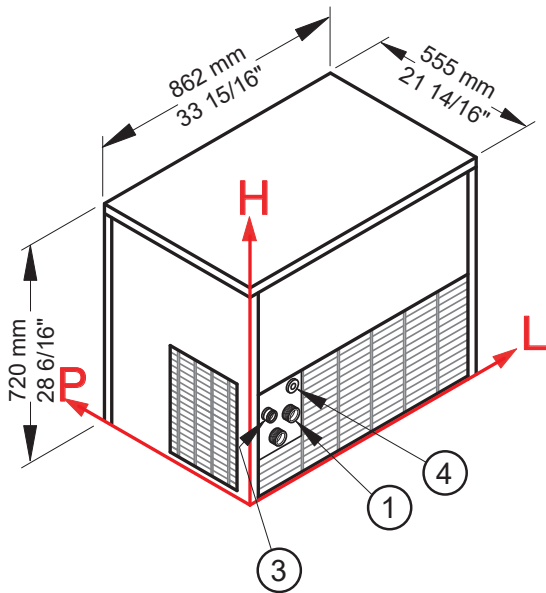

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
		10° C	50° F	21° C	70° F	32° C	90° F
Air temperature	10° C	155 kg					
	50° F		342 lbs				
	21° C			150 kg			
	70° F				331 lbs		
	32° C					138 kg	
	90° F						304 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 129 mm / 5 1/16" - 183 mm / 7 3/16" - 3/4"
- ③ Water out.: 65 mm / 2 9/16" - 285 mm / 11 4/16" - 24 mm / 15/16"
- ④ Electrical connections: 129mm / 5 1/16" - 263 mm / 10 6/16"

► Technical information

Production in 24h	150 kg / 331 lbs
Cooling system	A - W
Kind of cube	A - 18g C - 33g D - 13g E - 42g B - 60g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	1061 W
Fuse	16 A
Electrical consumption	20 kWh/100kg

Water consumption	A: 2 l/kg - 24 gal/100 lbs
	W: 15,8 l/kg - 189,3 gal/100 lbs
Sizes (L-P-H mm)	862 - 555 - 720
(L-P-H in)	33 15/16 - 21 14/16 - 28 6/16
Sizes with pack (L-P-H mm)	945 - 645 - 980
(L-P-H in)	37 3/16 - 25 6/16 - 38 9/16
Net wight	110 kg / 243 lbs
Gross weight	128 kg / 282 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:
Standard Cube (18 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 04 - Issued March 2025



www.bremagroup.it
info@bremacegroup.it

We are Brema

