




## Modular ice maker - Sprayer system Daily production up to 320 kg

Hotel  
Restaurant  
Fast food  
Bar  
Disco  
Fish market  
Supermarket  
Medical & SPA  
Industry

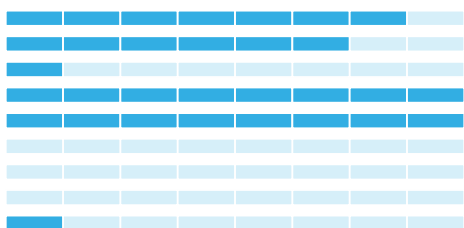


### ► Position n°

### ► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages



AISI 304 SS  
Scotch Brite finish




Removable and  
cleanable air filter

### ► Usable Bins

- Bin 350

### ► Available ice cube size

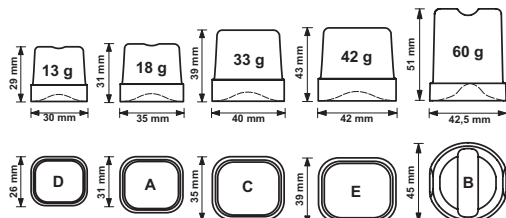

### ► Prod. 24h

|  | Air temp. |       | Water temp. |       | Kg  | Lbs |
|--|-----------|-------|-------------|-------|-----|-----|
|  | 10° C     | 50° F | 7° C        | 45° F | 320 | 705 |
|  | 21° C     | 70° F | 15° C       | 60° F | 300 | 661 |

**2 Years Warranty**  
subject to limitations

### ► Certifications available for this model






Ice Cube

# C 300



## Modular ice maker - Sprayer system Daily production up to 320 kg

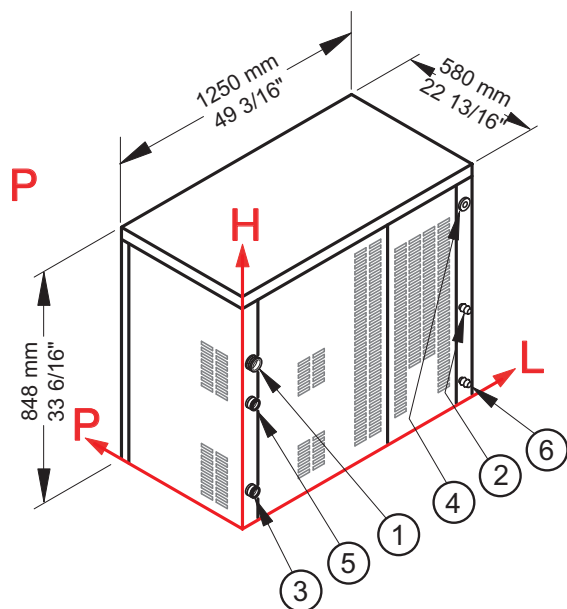

### ► Working conditions

- Location: **Indoor**

|                      | Min             | Max             |
|----------------------|-----------------|-----------------|
| Ambient temperature  | +10° C / +50° F | +43° C / 110° F |
| Water temperature    | +3° C / +37° F  | +32° C / +90° F |
| Voltage              | -10%            | +10%            |
| Water inlet pressure | 1bar (14 psi)   | 6bar (84 psi)   |

### ► Performances

|                 |       | Water temperature |         |        |         |        |         |
|-----------------|-------|-------------------|---------|--------|---------|--------|---------|
|                 |       | 7° C              | 45° F   | 15° C  | 60° F   | 21° C  | 70° F   |
| Air temperature | 10° C | 320 kg            |         |        |         |        |         |
|                 | 50° F |                   | 705 lbs |        |         |        |         |
|                 | 21° C |                   |         | 300 kg |         |        |         |
|                 | 70° F |                   |         |        | 661 lbs |        |         |
|                 | 32° C |                   |         |        |         | 260 kg |         |
|                 | 90° F |                   |         |        |         |        | 573 lbs |

### ► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 39 mm / 1 9/16" - 582 mm / 22 15/16" - 3/4"
- ③ Water out.: 29 mm / 1 2/16" - 73 mm / 2 14/16" - 24 mm / 15/16"
- ⑤ Water out.: 31 mm / 1 4/16" - 440 mm / 17 5/16" - 24mm / 15/16"
- ② ⑤ Only for water cooling systems

- ② Cond. water in.: 1217 mm / 47 15/16" - 298 mm / 11 12/16" - 3/4"
- ④ Electrical connections: 1222 mm / 48 2/16" - 748 mm / 29 7/16"
- ⑥ Cond. water out.: 1222 mm / 48 2/16" - 55 mm / 2 3/16" - 3/4"

### ► Technical information

|                           |                                        |
|---------------------------|----------------------------------------|
| Production in 24h         | 300 kg / 661 lbs                       |
| Cooling system            | A - W                                  |
| Kind of cube              | A-18g, C-33g, D-13g, E-42g, B-60g      |
| Refrigerant               | R452A                                  |
| Standard voltage          | 220-240 V ~ 50 Hz                      |
| Average power consumption | 3000 W                                 |
| Fuse                      | 32 A                                   |
| Finish                    | AISI 304 stainless steel, scotch brite |

|                            |                                                                    |
|----------------------------|--------------------------------------------------------------------|
| Water consumption          | A: 2,6 l/kg - 31,2 gal/100 lbs<br>W: 14,3 l/kg - 171,4 gal/100 lbs |
| Sizes (L-P-H mm)           | 1250 - 580 - 848                                                   |
| (L-P-H in)                 | 49 3/16 - 22 13/16 - 33 6/16                                       |
| Sizes with pack (L-P-H mm) | 1335 - 705 - 1005                                                  |
| (L-P-H in)                 | 52 9/16 - 27 12/16 - 39 9/16                                       |
| Net weight                 | 152 kg / 335 lbs                                                   |
| Gross weight               | 178 kg / 392 lbs                                                   |

All the technical information need to be considered at the following conditions:

Standard Cube (18 g)

Ambient temperature +21° C

Water temperature +15° C

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



[www.bremagroup.it](http://www.bremagroup.it)  
[info@bremaicigroup.it](mailto:info@bremaicigroup.it)

We are Brema

