






Fast Ice

VB 250 HC



Self-contained ice maker - Vertical evaporator system
Daily production up to 98 kg

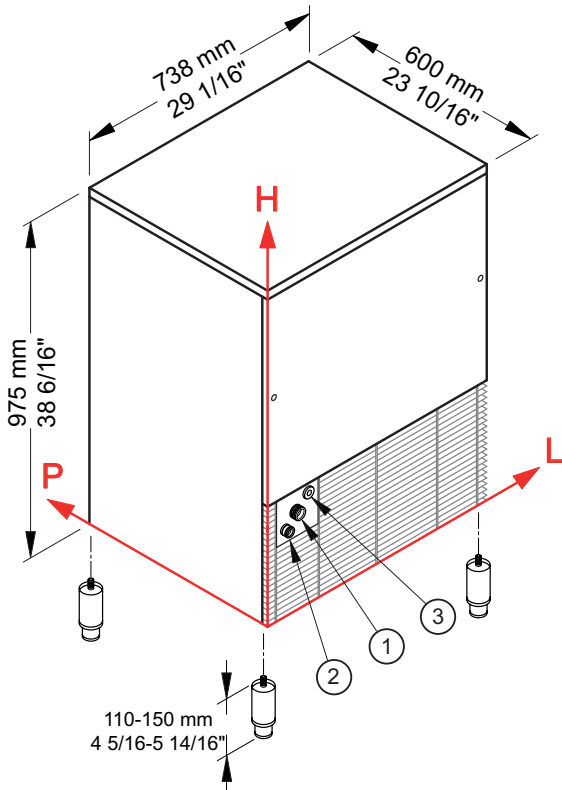

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	90 kg					
	50° F		198 lbs				
	21° C			98 kg			
	70° F				216 lbs		
	32° C					88 kg	
	90° F						194 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 115 mm / 4 8/16" - 245 mm / 9 10/16" - 3/4" ② Water out.: 53 mm / 2 1/16" - 200 mm / 7 14/16" - 24 mm / 15/16"
- ③ Electrical connections: 160 mm / 6 5/16" - 281 mm / 11 1/16"

► Technical information

Production in 24h	98 kg / 216 lbs	Water consumption	A: 2 l/kg - 14,2 gal/100 lbs
Store capacity, up to	35 kg / 77 lbs	Sizes (L-P-H mm)	W: 24 l/kg - 170,2 gal/100 lbs
Cooling system	A - W	(L-P-H in)	738 - 600 - 975
Kind of cube	7g	Sizes with pack (L-P-H mm)	29 1/16 - 23 10/16 - 38 6/16
Refrigerant	R290	(L-P-H in)	780 - 640 - 1120
Standard voltage	220-240 V ~ 50 Hz	Net weight	30 11/16 - 25 3/16 - 44 2/16
Average power consumption	710 W	Gross weight	68,5 kg / 151 lbs
Fuse	10 A	Finish	81 kg / 179 lbs
Finish	Acciaio inox18/8, scotch brite	Electrical Consumption	19 kWh/100kg

All the technical information must be considered at the following conditions:

- Sizes without feet
- Standard Cube (13 g)
- Ambient temperature +21° C
- Water temperature +15° C
- Electrical consumption at +32° C (standard voltage)
- Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued March 2025



www.bremagroup.it
info@bremoicegroup.it

We are Brema

