

Entry Max

Code	Model	Dimensions LxWxH cm			
P07EN10085	MAX 6L	↔ 134	↗ 92	↕ 38	
	Control	Chamber height cm		Cooking surface cm	
	Manual	15		105x70	
	Pizza Capacity	Max Temperature		Weight Kg	
	6 x Ø 30/34	 450 °C	 97		
	Total Power KW	Voltage V	Phases Ph	Frequency Hz	
	9,90	400	3N+T	50/60	



Entry Max

Code

P07EN10085

Model

MAX 6L

General Features

Stackable up to 3 single units.

Available in the version with a completely refractory stone.

Reduced heating, cooking times, and total energy consumption.

Reaches up to 450°C for all baking needs.



Entry Max


Code

P07EN10085

Model

MAX 6L

Options

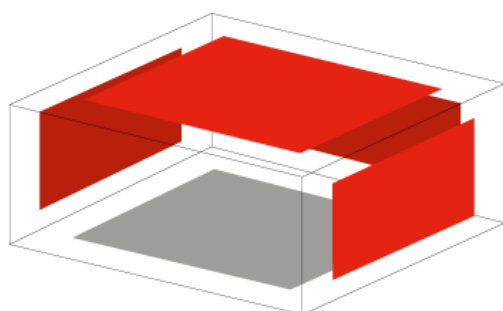

ENTRY MAX REFRACTORY CHAMBER

INTERNAL CHAMBER COVERED WITH REFRACTORY STONE

Cooking surface dimensions (L x W x H cm)

Code



102x68,5

S950065003



Entry Max

Code
P07EN10085

Model
MAX 6L

Accessories



SUPPORT ENTRY MAX
SUPPORT IN STAINLESS STEEL

	Code	Model	Size with feet cm	Size with wheels cm	Internal dimensions	Peso
	P11FN55003	S6L	132x82x105/108	S6L 132x82x106	115x65x73	31

Option **wheels**
Set of 4 rotating wheels 2 con freno + 2 senza freno

 Code
S66RU65003



Entry Max

Code
P07EN10085

Model
MAX 6L

Accessories



ENTRY MAX HOOD

STAINLESS STEEL HOOD SMOKE OUTLET DIAMETER 125-200mm

	Code	Model	Voltage V	Phases Ph	Frequency Hz	Light	Dimensions cm	Peso
	P13EN10012	K6L - K12L	230	1N + T	50	S	134x88x15	13

Option

EXTRACTOR HOOD MOTOR

ELECTRIC SUCTION MOTOR (POWER CONSUMPTION 50 W) With speed adjustment - power 313 m3/h


	Code	Power Supply V	Phases Ph	Frequency Hz	Net weight Kg
	S66MT55001	230	1N + T	50	3



Entry Max

Code
P07EN10085

Model
MAX 6L

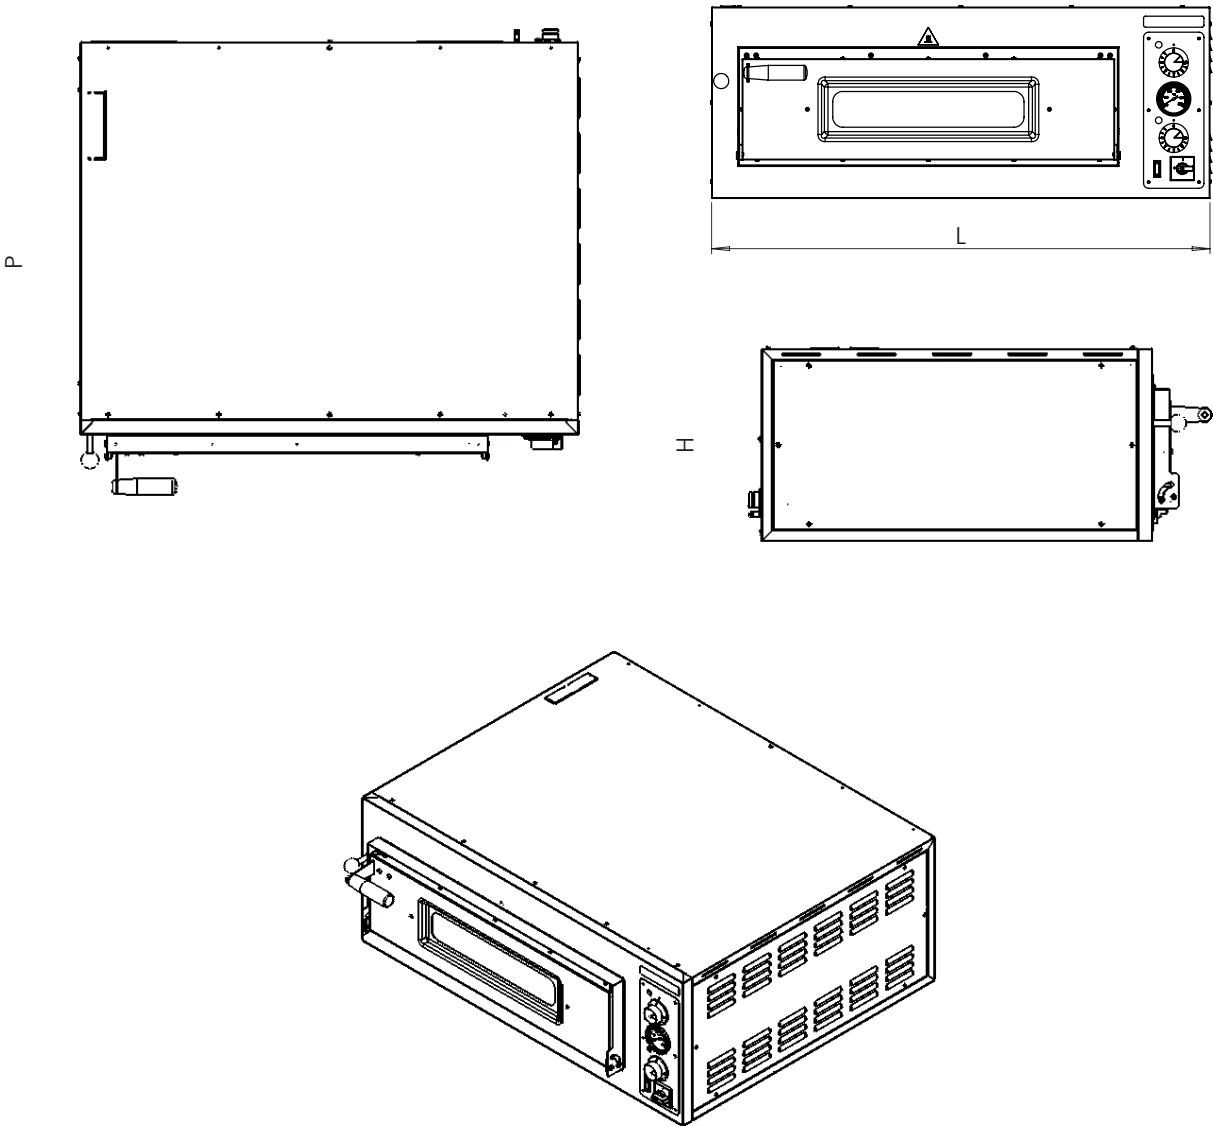

MOD	COD	DIMENSIONS (cm)		
		L	P	H
4	P07EN10083	99	92	38
6	P07EN10084	99	127	38
6L	P07EN10085	134	92	38
9	P07EN10086	134	127	38
8	P07EN10087	99	92	68
12	P07EN10088	99	127	68
12L	P07EN10089	134	92	68
18	P07EN10090	134	127	68

