




CB 955 HC

B-Qube



Self-contained ice maker - Sprayer system
Daily production up to 97 kg

Hotel
Restaurant
Fast food
Bar
Disco
Fish market
Supermarket
Medical & SPA
Industry

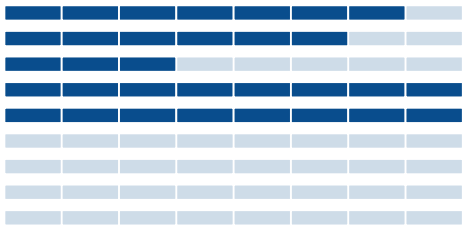


► Position n°



► Features & Plus

- Resistant and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard voltages
- HFC Free
- Automatic Washing system



Green-Tech Design



Side openings for better ventilation




Double water inlet (W models only)



Plug-in electrical connection

► Available ice cube size



Cube 23 grams
dimensions H 31.5 x L 32.5

► Prod. 24h

°C	Air temp.		Water temp.		kg	lbs
	10° C	50° F	7° C	45° F	97	214
	21° C	70° F	15° C	60° F	95	209

2 Years Warranty
subject to limitations

► Certifications available for this model



www.bremagroup.it
info@bremagroup.it

We are Brema






B-Qube

CB 955 HC



Self-contained ice maker - Sprayer system Daily production up to 97 kg

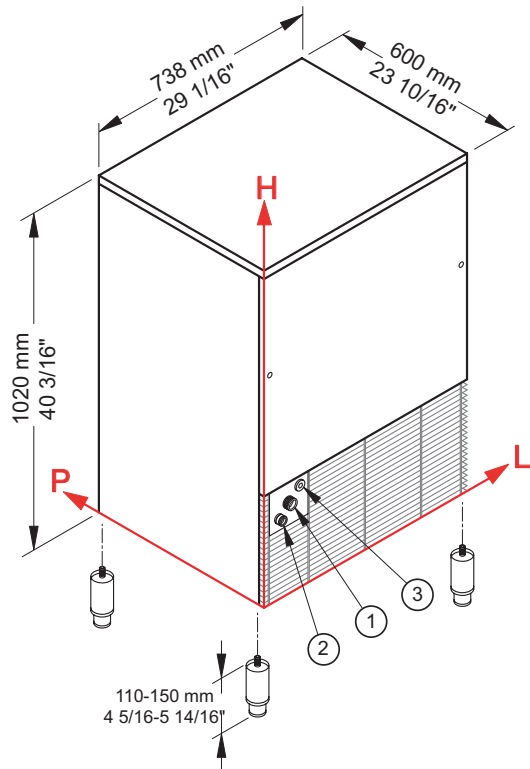

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	90 kg					
	50° F		198 lbs				
	21° C			95kg			
	70° F				209 lbs		
	32° C					82 kg	
	90° F						181 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 135 mm / 5 5/16" - 237 mm / 9 5/16" - 3/4"
- ② Water out.: 62 mm / 2 7/16" - 242 mm / 9 8/16" - 24 mm / 15/16"
- ③ Electrical connections: 100 mm / 3 15/16" - 312 mm / 12 5/16"
- ④ Cond. water in: 98 mm / 3 14/16" - 177 mm / 6 15/16" - 3/4"
- ④ Only for water cooling systems

► Technical information

Production in 24h 95 kg / 209 lbs

Store capacity, up to 55 kg / 121 lbs

Cooling system A - W

Kind of cube Q-23g

Refrigerant R290

Standard voltage 220-240 V ~ 50 Hz

Average power consumption 870 W

Fuse 10 A

Electrical consumption 23 kWh/100kg

Water consumption A: 2,3 l/kg - 27,6 gal/100 lbs

W: 16,5 l/kg - 197,7 gal/100 lbs

Sizes (L-P-H mm) 735 - 603 - 1010

(L-P-H in) 28 15/16 - 23 12/16 - 39 12/16

Sizes with pack (L-P-H mm) 780 - 640 - 1185

(L-P-H in) 30 11/16 - 25 3/16 - 46 10/16

Net weight 74 kg / 163 lbs

Gross weight 86 kg / 190 lbs

Finish AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (23 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremagroup.it

We are Brema

